

KINEDYNE® LIFTING SLINGS

TYPE 4 - TWISTED EYE-TO-EYE SLINGS



ENGINEERED TO BE TOUGH,
FLEXIBLE, SECURE AND
LIGHTWEIGHT.




Meets or exceeds:
OSHA, ASME B30.9 and WSTDA
Standards and Regulations

KEY FEATURES:

- ☛ Eye turned/twisted 90 degrees for smoother Choker hitch and better basket hitch fit
- ☛ Flexible and Lightweight
- ☛ 2-Ply polyester for reduced stretch, increased Strength and moisture and abrasion resistant
- ☛ Available in 1" and 2"

RATED FOR:

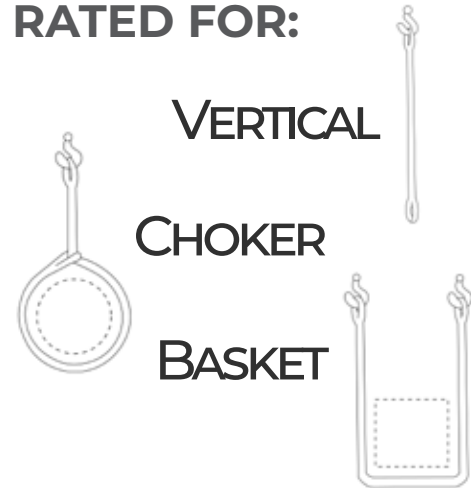

Customer Service - United States

Phone: (800) 848-6057
E-mail: customerservice@kinedyne.com

1104 Washington Ferry Road
Prattville, AL 36067

Customer Service - Canada

Phone: (800) 268-3530
E-mail: orderdesk@kinedyne.com

10 Maybrook Drive
Toronto, Ontario M1V 4B6



TYPE 4 - TWISTED EYE-TO-EYE SLINGS

COMPLETE LINE OF KINEDYNE LIFTING SLINGS

Product Number	Width of Web Sling (inches)	Length of Web Sling (feet)	Diameter of Sling Eye	Weight of Assembly (lbs)	Weight of Assembly (kgs)	Working Load Limit Choker (lbs)	Working Load Limit - Vertical (lbs)	Working Load Limit - Vertical Basket (lbs)
EE2-9801X4-KIN	1"	4'	8.5"	0.7	0.318	2,450	3,100	6,200
EE2-9801X8-KIN	1"	8'	10"	1.2	0.544	2,450	3,100	6,200
EE2-9802X10-KIN	2"	10'	12"	3.2	1.452	4,950	6,200	12,400
EE2-9802X12-KIN	2"	12'	14"	3.6	1.633	4,950	6,200	12,400
EE2-9802X16-KIN	2"	16'	11"	4.5	2.041	4,950	6,200	12,400
EE2-9802X20-KIN	2"	20'	11"	5.9	2.676	4,950	6,200	12,400
EE2-9802X30-KIN	2"	30'	12"	8.3	3.765	4,950	6,200	12,400
EE2-9802X3-KIN	2"	3'	8.5"	1.2	0.544	4,950	6,200	12,400
EE2-9802X4-KIN	2"	4'	7"	1.5	0.68	4,950	6,200	12,400
EE2-9802X6-KIN	2"	6'	14"	2	0.907	4,950	6,200	12,400
EE2-9802X8-KIN	2"	8'	13"	2.5	1.134	4,950	6,200	12,400